

# HRL 1223W F2

## 12V 23W

HRL 1223W F2 is specially designed for high efficient discharge and long life.application. It's characteristics are small volume, light weight and high discharge efficiency. It can be used for more than 260 cycles at 100% discharge in cycle service, or five to eight years in standby service.




### Specification

Cells per unit	6
Voltage per unit	12
Capacity	23W @15 munute-rate to 1.67V per cell @25°C (77°F)
Weight	Approx. 2.1kg (4.62 lbs)
Maximum Discharge Current	130A(5sec)
Internal Resistance Approx.	Approx. 19mΩ
Operating Temperature Range	Discharge: -20°C~50°C (-4°F~122°F) Charge: 0°C~40°C (32°F~104°F) Storage: -20°C~40°C (14°F~104°F)
Nominal Operating Temperature Range	25°C ±3°C (77°F ±5°F)
Float Charging Voltage	13.5 to 13.8 VDC/unit Average at 25°C (77°F)
Recommended Maximum Charging Current Limit	2.3A
Equalization and Cycle Service	14.4 to 15.0 VDC/unit Average at 25°C (77°F)
Self Discharge	CSB Batteries can be stored for more than 6 months at 25°C(77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
Terminal	Faston Tab 187/250
Container Material	-ABS (UL94-HB)*Flammability resistance of UL94-V2 can be available upon request.



CSB-manufactured batteries are UL-recognized components under UL924 as well as ISO 9001 and ISO 14001 certified.

### Dimensions unit:(MM)

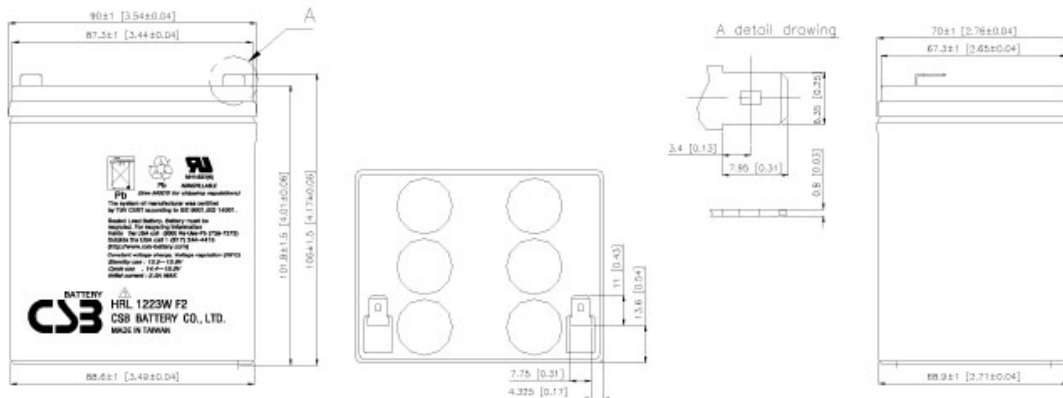

### Constant Current Discharge Characteristics Unit:A(25°C,77°F)


F.V/Time	2MIN	4MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	48.2	34.8	28.3	23.2	19.1	14.0	12.2	8.40	4.40	3.22
1.67V	44.9	32.7	27.0	22.0	18.3	13.6	11.6	8.05	4.26	3.10
1.70V	43.5	31.9	26.3	21.6	17.9	13.3	11.3	7.88	4.20	3.05
1.75V	41.1	30.4	25.4	20.9	17.1	12.9	11.2	7.87	4.18	2.95
1.80V	39.0	28.9	24.4	20.2	16.3	12.5	11.1	7.85	4.16	2.85
1.85V	36.9	27.4	23.5	19.4	15.5	12.1	11.0	7.84	4.14	2.75

### Constant Power Discharge Characteristics Unit:Watt(25°C,77°F)


F.V/Time	2MIN	4MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	540	390	317	260	218	160	139	99.1	51.9	38.0
1.67V	502	366	302	247	209	155	132	95.0	50.3	36.6
1.70V	487	357	295	242	205	152	129	93.0	49.6	36.0
1.75V	460	341	284	234	195	147	127	92.8	49.4	34.8
1.80V	437	323	274	227	186	142	126	92.7	49.1	33.6
1.85V	413	307	263	218	177	138	125	92.5	48.9	32.5

- All mentioned values are average values.
- Low rate discharge mode (over 90 mins.) is not recommended.


**Trickle (or Float) Service Life**

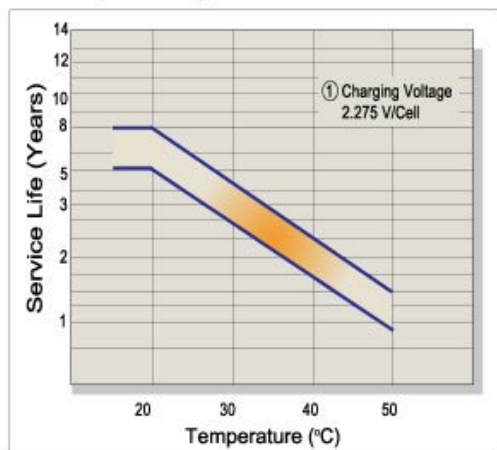


**Capacity Retention Characteristic**

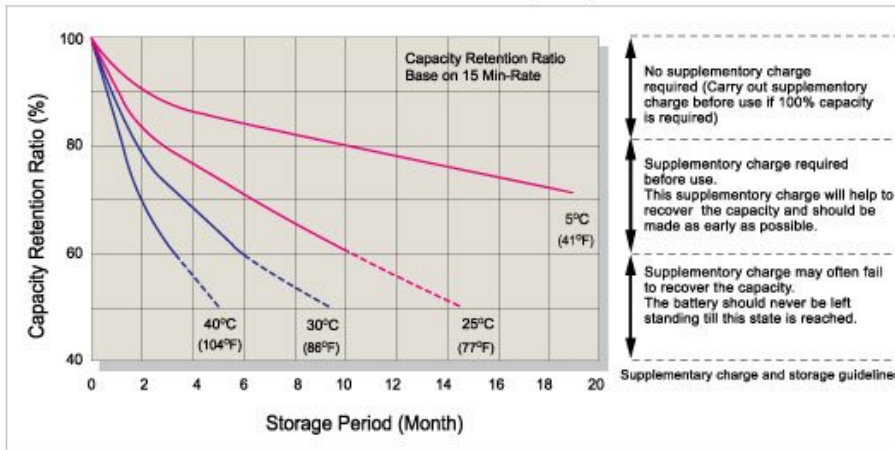


**Battery Voltage and Charge Time for Standby Use**

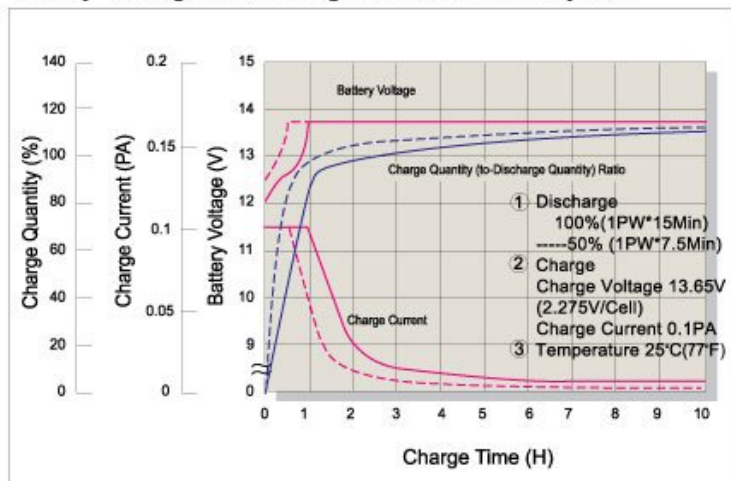


**Cycle Service Life**

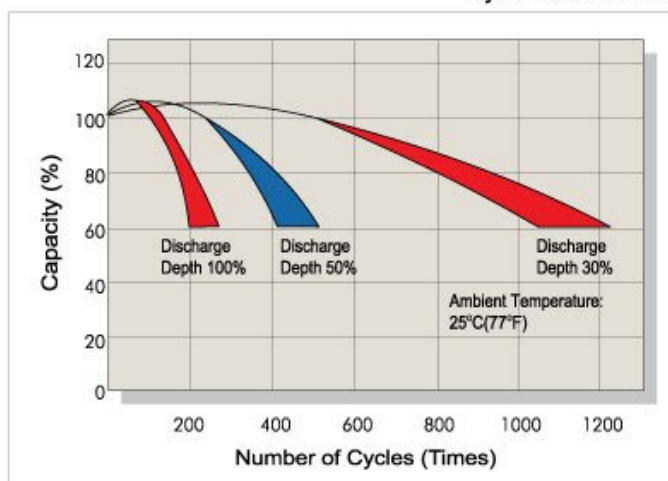

**Battery Voltage and Charge Time for Cycle Use**

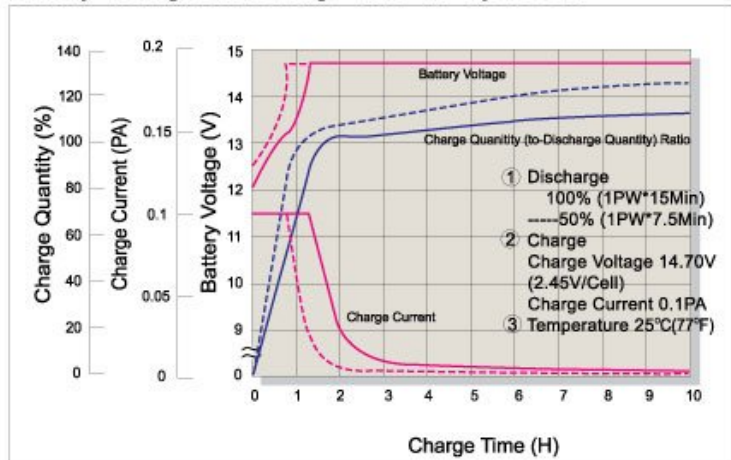

**Terminal Voltage (V) and Discharge Time (25°C77°F)**

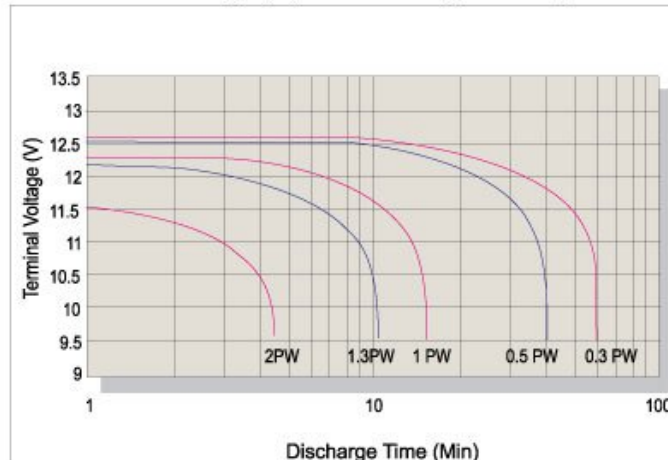

**Charging Procedures**

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.1PA
Standby	25°C(77°F)	2.275	2.25~2.30	